


RINGSPANN®

Gear Couplings

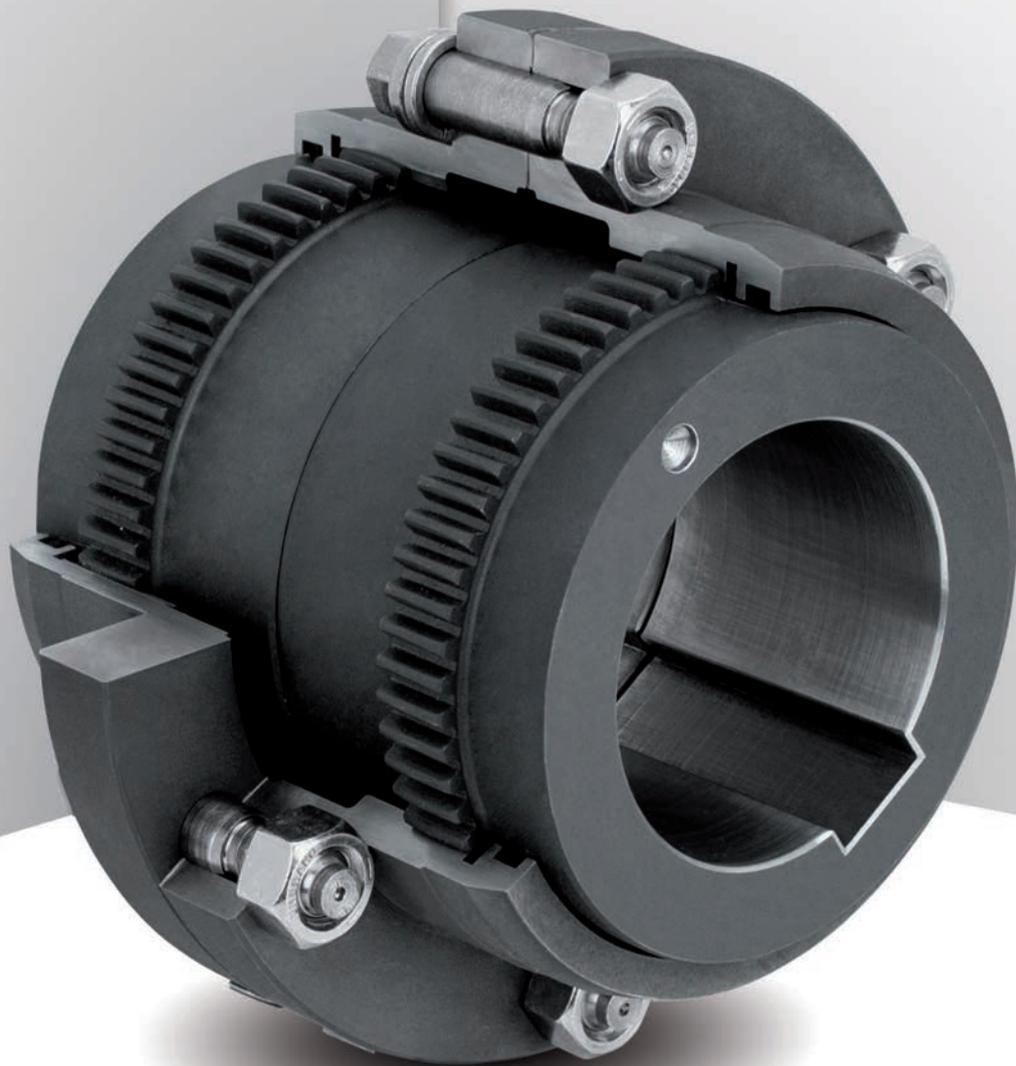

Gear Couplings

Nominal torques
over 390 000 Nm

torsionally rigid

Hubs 3D
crowned toothed

Manganese phosphated
as standard

Hubs balanced according
to DIN ISO 1940 grade 6.3

AGMA 9008-B00 conformity
up to size 0090

Your benefit

- >> Corrosion protection
- >> Smooth run due to standard balanced hubs
- >> Compact design
- >> High power density
- >> Compensation of axial, radial and angular misalignments
- >> Design with one-sided rigid hub available
- >> Interchangeable industry standard